



Happy Haven Day Care Network Proposal


By Jayden Cathey




Objectives

- Establish a network across a 6,600-square-foot, single-story facility with no pre-existing walls or cabling.
- Support a fully networked computer lab with 20 workstations, along with a computer for every classroom and administrative office.
- Enable secure, efficient check-in/check-out processes for children and parents.

Floor Plan

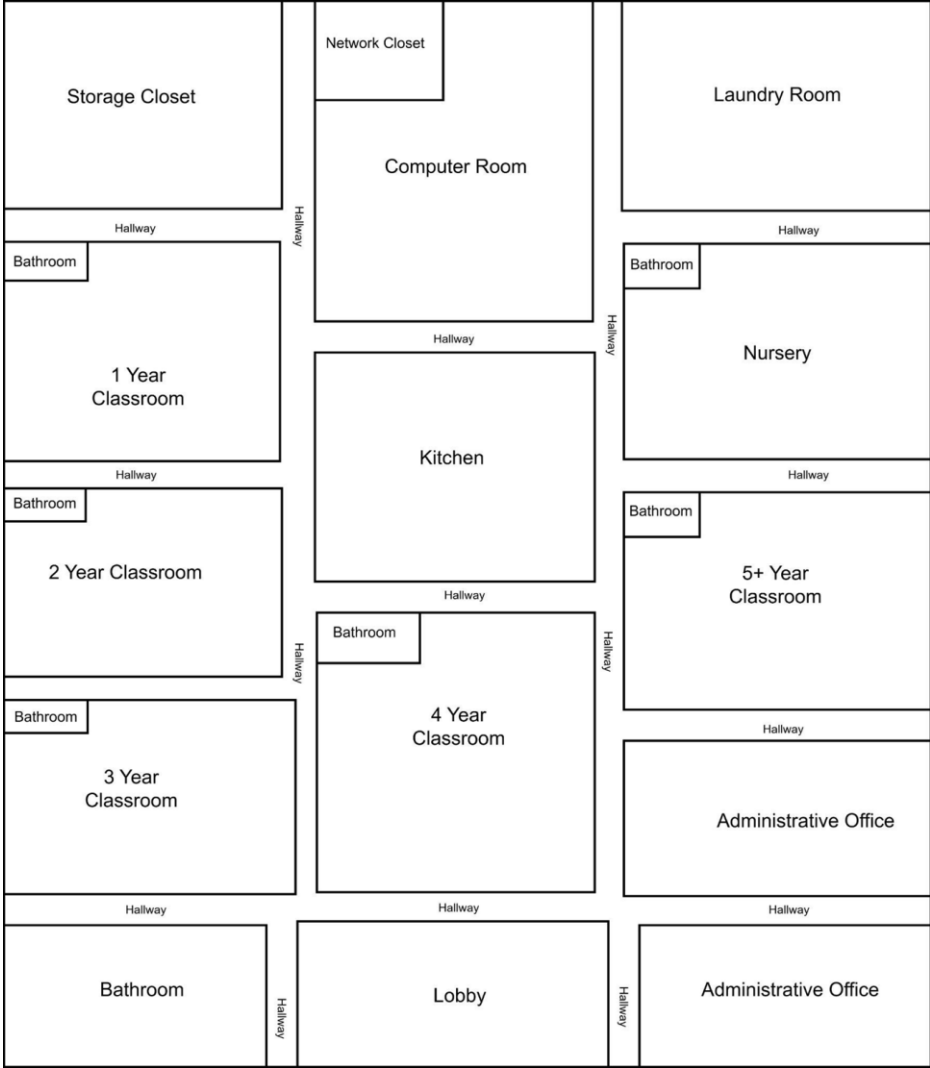

Network Design

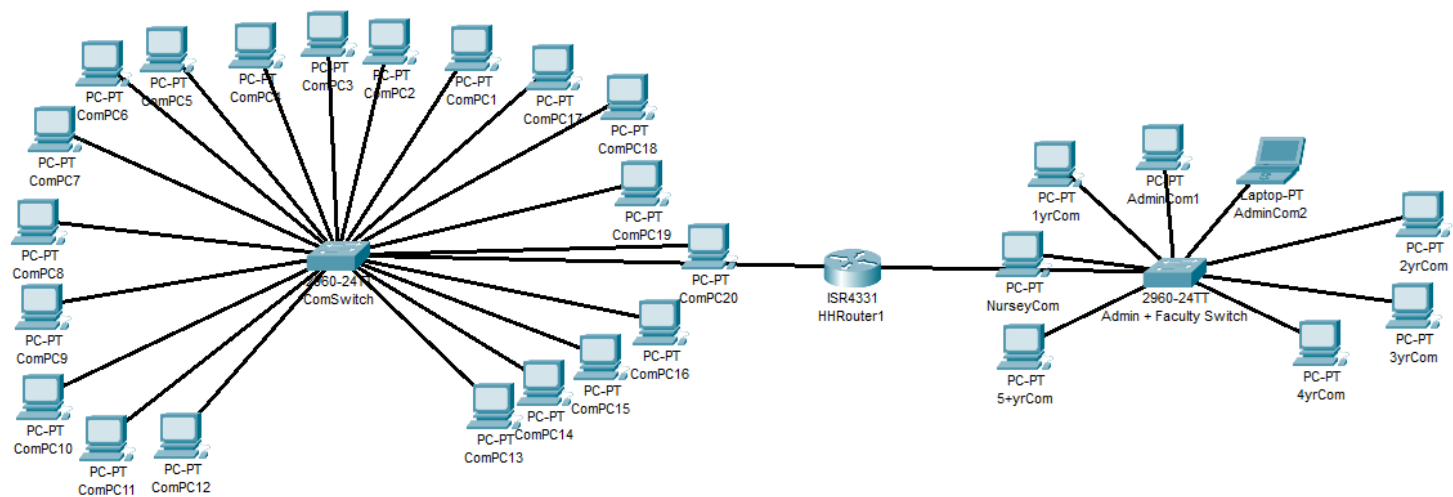

Keyless Door Lock

- Supports up to 20 user passcodes, one-time code, and physical keys
- Can be set to auto lock in 10-99 seconds



12 Port Cisco Catalyst Managed Switch

- Cisco Business mobile app to set up, manage and monitor the switch
- Security to protect against network attacks




24 Port Cisco Catalyst Managed Switch

- Cisco Business mobile app to set up, manage and monitor the switch
- Security to protect against network attacks and unauthorized users



Cisco Cloud Managed Router

- Meraki Go app to set up and manage
- Free automatic security and software updates, mobile/web portal management, and tech support

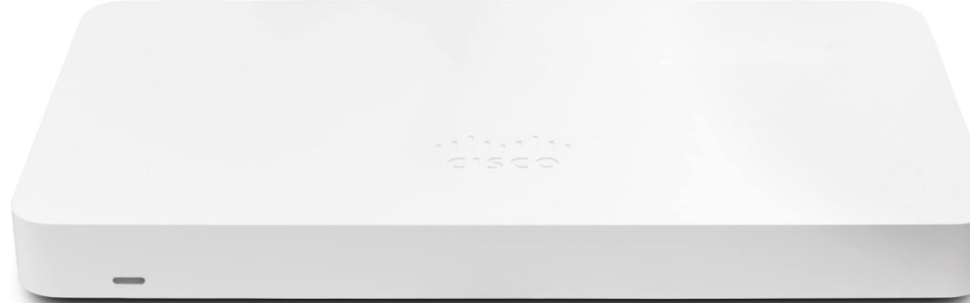

Dell - Inspiron 3030 Desktops

- 16GB of RAM
- SSD storage type
- 1TB total storage capacity
- Runs Windows 11



Dell - Inspiron 15.6" FHD Laptop

- 8GB of RAM
- SSD storage type
- 512 gigabytes total storage capacity
- 11 hours of battery life
- Runs Windows 11



Dell - InSync 27" Monitor (HDMI)

- 75HZ refresh rate
- 1920 x 1080 Maximum Resolution
- Compatible with Windows 11



HDMI Cables

- 10 ft long



Used to connect desktop computers to monitors/transmit audio and video

Cat6 Stranded Bulk Ethernet Cable

- 1,000 ft
- 10 Gbps
- Used to connect devices to switches/routers




Bulk Cat6 Rj45 Connectors



Commonly used connector for wired networks

Ethernet Wall Plates

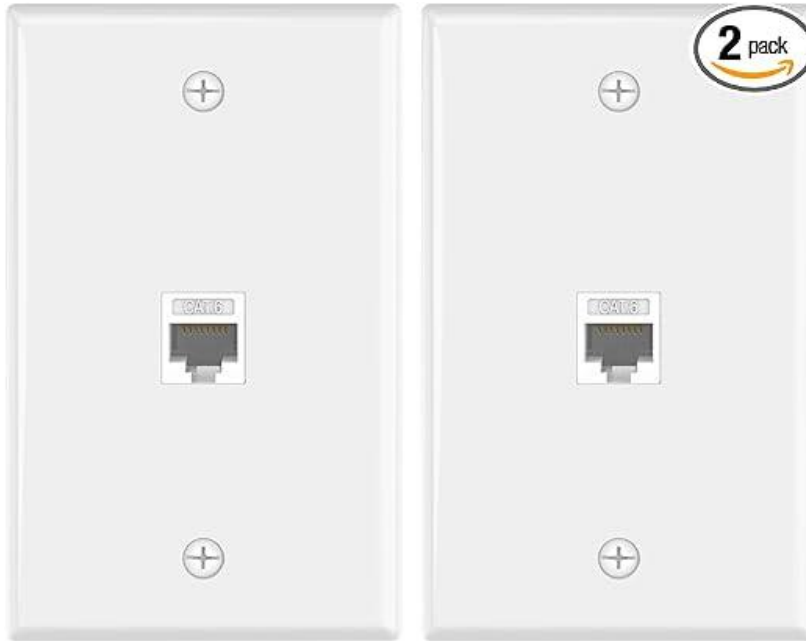

Used to connect ethernet cables from desktops to network cables in the walls

48 Port Cat6 Patch Panel

- Supports 10GB Ethernet
- Used to organize cables



Keystone Jacks



Used to connect patch panel/wall plates with ethernet cables

Server Rack

- Removable side panels
- Lockable doors for security
- Easy construction
- Built-in fans and ventilation to prevent overheating



Budget

Hardware	\$35,798.45
Labor	\$2,716.03
Total Cost	\$38,514.48



Thank you.

